


材料 Ma a TN40H

特点 F a

耐热冲击 T a S c R a c

Complex permeability vs.Frequency

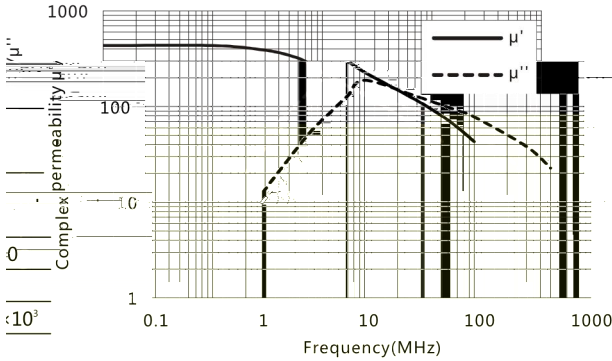

Initial permeability	μ_i	25°C	400±20%
Saturation magnetic flux density	B_s (mT)	25°C	410
Max density			4000A/m
Relative loss factor	$\tan\delta/\mu_i$	25°C	≤25
100kHz	($\times 10^{-6}$)		
Relative temperature coefficient	α_{μ_i}	20~60°C	2.5
	($\times 10^{-6}/^{\circ}\text{C}$)		
Curie temperature	$T_c(^{\circ}\text{C})$		>25
Electrical resistivity	$\rho(\Omega\cdot\text{m})$		10^6
Density	$d(\text{kg}/\text{m}^3)$		5.1


Test core : Toroid(mm)

OD : 12.7


ID : 7.9

H : 6.5

Relative loss factor vs.Frequency

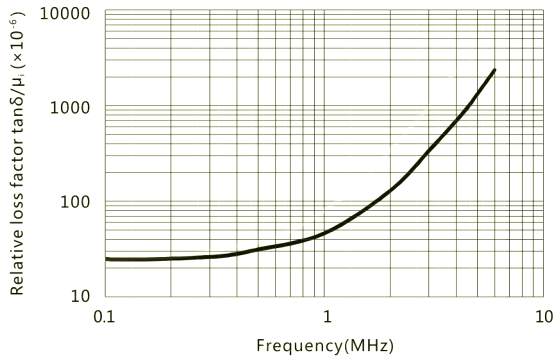

Initial permeability vs. Temperature

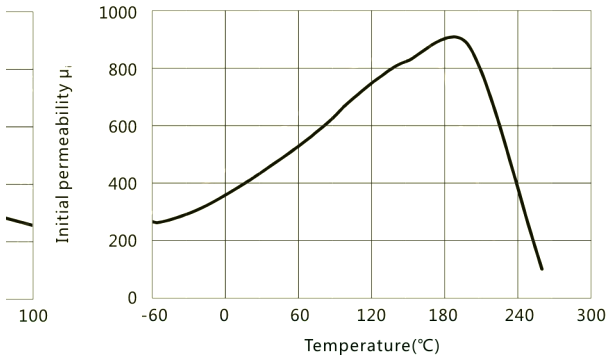

Flux density vs. Temperature

