


材料 Ma a TN65B

特点 F a

高饱和磁通密度 H B

Complex permeability vs.Frequency

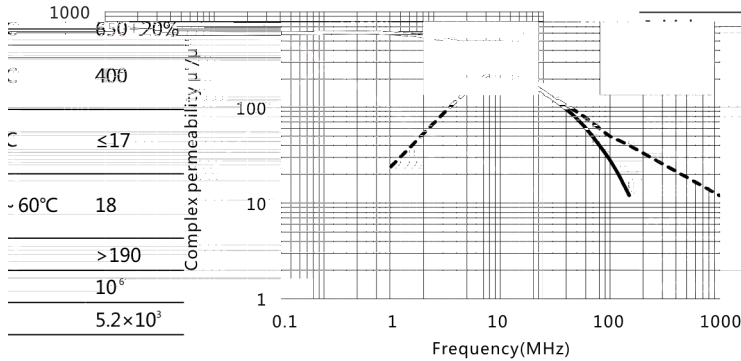

Initial permeability μ_i	25%
Saturation magnetic flux density B_s (mT)	25%
Relative loss factor $\tan\delta/\mu_i$ 100kHz	($\times 10^{-6}$) 25%
Relative temperature coefficient α_{μ}	($\times 10^{-6}/^{\circ}\text{C}$) 20%
Curie temperature $T_c(^{\circ}\text{C})$	
Electrical resistivity $\rho(\Omega\cdot\text{m})$	
Density $d(\text{kg}/\text{m}^3)$	





Test core : Toroid(mm)

OD : 12.7

ID : 7.9

H : 6.5

Relative loss factor vs.Frequency

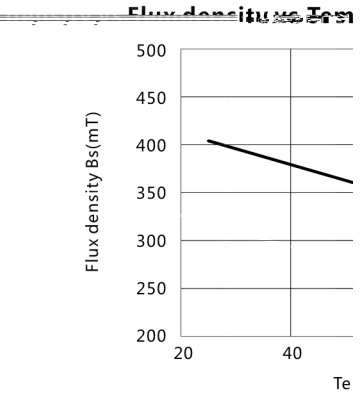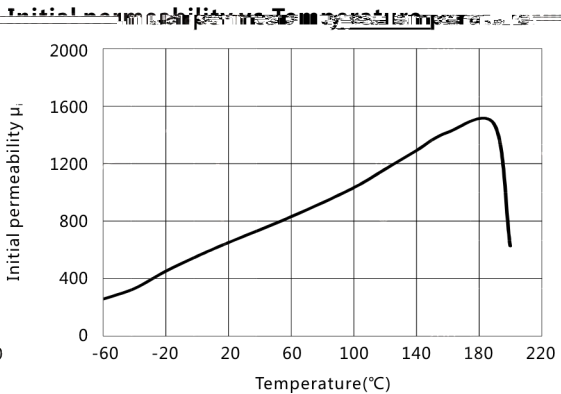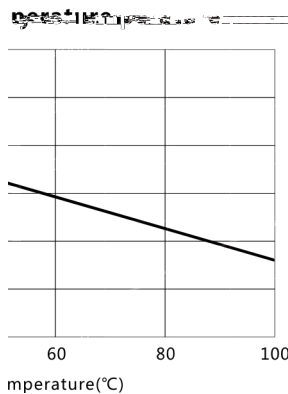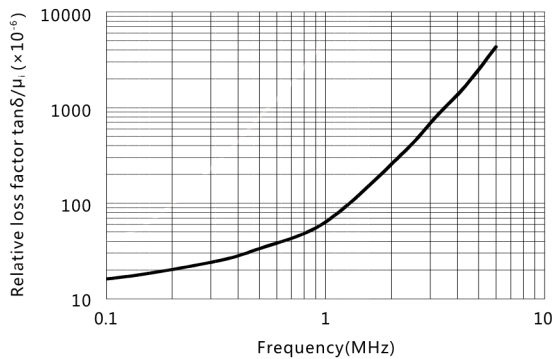

Temperature(°C)

Temperature(°C)

Te