


材料 Ma a TN65H

特点 F a

耐热冲击 T a S c R a c

Complex permeability vs.Frequency

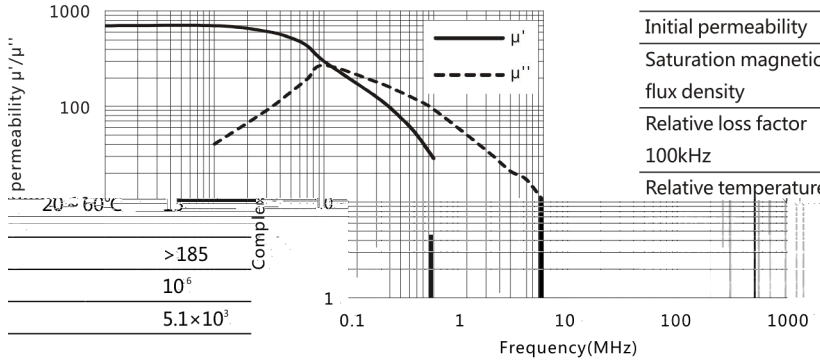

Initial permeability	μ_i	25°C	650±20%
Saturation magnetic flux density	B_s (mT)	25°C	400
Relative loss factor 100kHz	$\tan\delta/\mu_i$ ($\times 10^{-6}$)	25°C	≤15
Relative temperature coefficient	α_{air}		($\times 10^{-6}/^\circ C$)
Curie temperature	T_c (°C)		
Electrical resistivity	ρ (Ω·m)		
Density	d (kg/m ³)		


Test core : Toroid(mm)

OD : 12.7


ID : 7.9

H : 6.5


Relative loss factor vs.Frequency

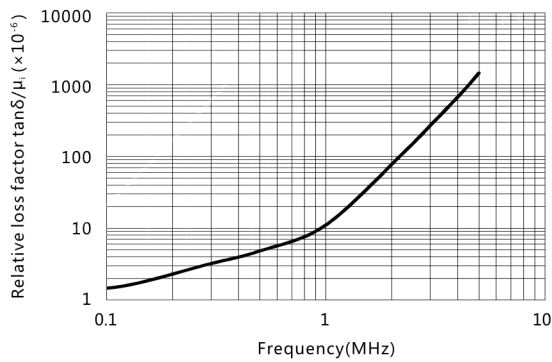

s.Temperature



Initial permeability vs.Temperature

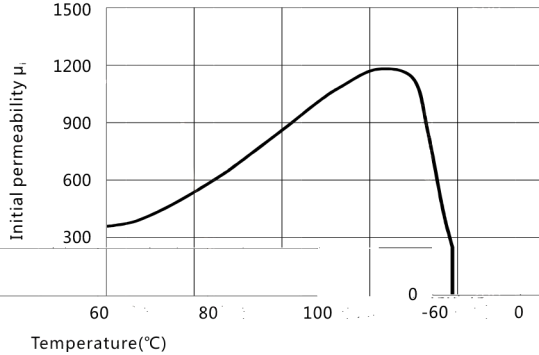

Flux density vs. Temperature

